

# Human-Centered Design and Evaluation of Haptic Cueing for Teleoperation of Multiple Mobile Robots

Hyoungh Il Son, *Member, IEEE*, Antonio Franchi, *Member, IEEE*, Lewis L. Chuang, Junsuk Kim, Heinrich H. Bühlhoff, *Member, IEEE*, and Paolo Robuffo Giordano, *Member, IEEE*

**Abstract**—In this paper, we investigate the effect of haptic cueing on a human operator's performance in the field of bilateral teleoperation of multiple mobile robots, particularly multiple unmanned aerial vehicles (UAVs). Two aspects of human performance are deemed important in this area, namely, the *maneuverability* of mobile robots and the *perceptual sensitivity* of the remote environment. We introduce metrics that allow us to address these aspects in two psychophysical studies, which are reported here. Three fundamental haptic cue types were evaluated. The *Force* cue conveys information on the proximity of the commanded trajectory to obstacles in the remote environment. The *Velocity* cue represents the mismatch between the commanded and actual velocities of the UAVs and can implicitly provide a rich amount of information regarding the actual behavior of the UAVs. Finally, the *Velocity+Force* cue is a linear combination of the two. Our experimental results show that, while *maneuverability* is best supported by the *Force* cue feedback, *perceptual sensitivity* is best served by the *Velocity* cue feedback. In addition, we show that large gains in the haptic feedbacks do not always guarantee an enhancement in the teleoperator's performance.

**Index Terms**—Bilateral teleoperation, maneuverability, multi-robot systems, perception, psychophysics.

## I. INTRODUCTION

THE USE OF multirobot systems, when compared to single-robot approaches, allows several improvements to be achieved in terms of reduced completion times and increased robustness [1], [2]. Given their high motion flexibility, unmanned aerial vehicles (UAVs) have been particularly popular

Manuscript received July 19, 2011; revised December 9, 2011 and April 12, 2012; accepted July 29, 2012. Date of publication September 4, 2012; date of current version April 16, 2013. This work was supported in part by the Max Planck Society, by the World Class University Program funded by the Ministry of Education, Science and Technology through the National Research Foundation of Korea under Grant R31-10008, and by Korea Research Foundation Grant NRF-2011-357-D00003 funded by the Korean Government. This paper was presented in part at the World Haptics Conference, Istanbul, Turkey, June 22–24, 2011, and in part at the International Conference on Intelligent Robots and Systems, San Francisco, CA, September 25–30, 2011. This paper was recommended by Associate Editor V. Murino.

H. I. Son, A. Franchi, L. L. Chuang, and P. Robuffo Giordano are with the Max Planck Institute for Biological Cybernetics, 72076 Tübingen, Germany (e-mail: hyoungil.son@tuebingen.mpg.de; antonio.franchi@tuebingen.mpg.de; lewis.chuang@tuebingen.mpg.de; prg@tuebingen.mpg.de).

J. Kim is with the Department of Brain and Cognitive Engineering, Korea University, Seoul 136-713, Korea (e-mail: wowkjs@korea.ac.kr).

H. H. Bühlhoff is with the Max Planck Institute for Biological Cybernetics, 72076 Tübingen, Germany, and also with the Department of Brain and Cognitive Engineering, Korea University, Seoul 136-713, Korea (e-mail: hhb@tuebingen.mpg.de).

Color versions of one or more of the figures in this paper are available online at <http://ieeexplore.ieee.org>.

Digital Object Identifier 10.1109/TSMCB.2012.2212884

among the different multirobot systems [3]. Recent years have seen an increasing development in the bilateral teleoperation algorithms for the efficient and robust control of multiple mobile robots (e.g., see [4]–[7]). Nonetheless, comparatively, less attention has been devoted toward understanding how teleoperation performance can be improved with regard to the human operator. Given this level of interest in *multiple-mobile-robot teleoperation*, we believe that it is worthwhile to investigate how human control performance can be assessed within this context.

The overall performance of bilateral teleoperation systems relies on the human operator's command. Therefore, it seems advisable to take human control effort into consideration when defining performance metrics for our teleoperation system. For example, *maneuverability* performance would be considerably enhanced if the same tracking performance could be achieved with less control effort. This perspective seems particularly reasonable in the case of a multirobot system which can typically require more control effort for realizing an effective maneuvering when compared to the single-robot case, due to their more complex dynamics and interactions.

Similarly, a sensitive *perception* of the remote environment is often considered to be important for effective bilateral teleoperation systems. In the case of remote mobile robots (e.g., teleoperation of UAVs), visual feedback can often be limited by the onboard camera restrictions (e.g., restricted field of view (FOV) and poor resolution) [8], [9]. This could severely limit teleoperational success and result in undesired collisions with remote obstacles. Providing haptic cues could alleviate this limitation. Unlike conventional teleoperation [10] (e.g., telesurgery), however, hard contact between flying UAVs and their physical environment is particularly undesirable because it could cause severe damages to the mechanical structure of the robots. Therefore, there are no actual physical forces to be transmitted to the multi-UAV teleoperator, and the conventional objectives of force tracking are not applicable. For this reason, pure force tracking may not be a measurable concept that can be directly generalized to the teleoperation of mobile robots. In this sense, transparency [11] is also not a suitable measure for the perceptual ability in the teleoperation of remote UAVs.

To sum up, evaluating human performance in the bilateral teleoperation of multi-UAVs should address the control effort required in maneuvering the mobile robots as well as the perceptual sensitivity of the operator of the remote environment. The contribution of providing haptic cues should be assessed accordingly.

### A. Previous Works

Frequency response analysis using transfer functions is a general approach in analyzing performance in the domain of bilateral teleoperation (e.g., transparency in [12] and position and force tracking in [13]). Likewise, the relationship between the teleoperator's control effort and maneuvering accuracy can be analyzed in terms of a frequency response function for the evaluation of maneuverability performance. Maneuverability has been proposed to be an important measure of the effectiveness of master–slave systems [14]. However, this work specifically focused on the transmission of position and force errors between the master and slave devices and not on actual human performance per se.

Some researchers have explicitly studied human performance in teleoperation systems. Chen *et al.* [15] provide excellent surveys on teleoperation systems in the context of human performance issues and user interface designs. Notably, maneuverability of a master haptic device has been studied in [16]. Here, the authors proposed a measure for the maneuverability of the master device by considering the musculoskeletal model of an operator. Recently, Nambi *et al.* have also studied the human controllability on the master device to see an effect of velocity, admittance gain, and force on the performance using admittance-type devices [17].

Some research studies have addressed how human perceptual sensitivity can be enhanced in the conventional teleoperation [18]–[22]. Among these, fidelity has been proposed as an objective based on the claim that the information about the relative changes of environment impedance is more important for interactions with soft tissues than the environment impedance alone; see [18]. Taking inspiration from [18], De Gerssem *et al.* provided empirical evidence that a relative change in the transmitted stiffness to the operator could be increased by tuning the control parameters of a teleoperation controller [19]. Modified position/force scaling approaches were developed between the master and the slave, using a nonlinear filtered scaling and a time-varying scaling in [20] and [21], respectively. Son *et al.* proposed in [22] a quantitative index for the perception based on psychophysics and then showed that the operator's detection and discrimination could be enhanced by a perception-index-maximized controller via psychophysical experiments.

In a recent study, the effectiveness of various artificial forces for collision avoidance was evaluated in the teleoperation of a single UAV [23]. An ecological interface paradigm was presented in [24], which provides multiple visual information into a 3-D mixed-reality display in mobile robot teleoperation. A series of principles for presenting the information to improve an operator's situation awareness of a remote robot was presented in [24]. In addition, the effects of various factors (e.g., time delay, force-reflecting method, and image-display alternatives) on obstacle avoidance performance of mobile robot teleoperation were studied through subjective tests using several measures [25]. A fuzzy force-reflection method was also proposed and compared against a conventional proportional–derivative (PD)-type force-reflection method. There were more fundamental studies to understand human's neuromuscular system in a car driving with haptic feedback. Venrooij *et al.* proposed a method

to measure the biodynamic feedthrough and admittance of a human operator simultaneously in a motion simulator [26]. A similar study was presented in [27] to determine a driver's biomechanical properties of the ankle–foot complex during a car-following task.

Although it is evident that, recently, a number of researchers have focused their attention on human perspective studies in mobile robot teleoperation, still, few works have addressed the case of teleoperation of multiple mobile robots.

### B. Objective and Outline

The aim of this paper is to build upon the control framework introduced in [6] by the authors and to discuss how information from the remote UAV group (slave side) can be appropriately transformed into haptic cues for the human operator via the master device. Subsequently, we will present and discuss a systematic evaluation of the contribution of the proposed cues to teleoperation performance from the human operator perspective via psychophysical studies. To this end, we first introduce a performance index of the teleoperation system of remote UAVs, i.e., *maneuverability*, in terms of how easily the operator can control the movement of the slave system accurately. We then discuss a second performance index, *perceptual sensitivity*, aimed at measuring how well the operator is able to perceive the current state of the UAVs and their surrounding obstacles.

The structure of this paper is as follows. In Section II, the concepts of maneuverability and operator perceptual sensitivity are introduced together with suitable metrics that take human performance into account. Following this, Section III reviews the control architecture for the bilateral teleoperation of multiple UAVs in [6]. Three haptic feedback algorithms are then introduced within the context of this framework. After presenting our experimental method in Section IV, these haptic feedback algorithms are subsequently evaluated, using our proposed metrics, to determine the algorithm that achieves the best level of maneuverability performance and operator sensitivity in Sections V and VI, respectively, followed by discussions in Section VII. This paper ends with our conclusions and recommendations for future work.

## II. PERFORMANCE MEASURES

### A. Maneuverability

1) *Position Tracking of Slave Robot*: In conventional teleoperation research, the position tracking ability of the slave is typically evaluated by estimating the discrepancy between the positions of the slave and the master. In the current work, we are concerned with the discrepancy between the position of the slave and the target position on the reference path that the teleoperator intends to maneuver to. Therefore, the position tracking error is defined as

$$e_p(t) := \bar{x}(t) - x_{\text{ref}}(t) \quad (1)$$

for  $N$  slave robots, wherein  $\bar{x}(t) = (1/N) \sum_{i=1}^N x_i(t)$ ,  $x_i(t) \in \mathbb{R}^3$  represents the position of the  $i$ th robot, and  $x_{\text{ref}}(t) \in \mathbb{R}^3$  represents the target position at time  $t$ . In conventional

teleoperation,  $x_{\text{ref}}$  would typically be treated as the position of the master.

This position tracking error can be quantitatively evaluated across the entire operation time using cross correlation ( $CC$ ). This allows objectively comparing the similarities of the actual path ( $\bar{x}$ ) and the desired path ( $x_{\text{ref}}$ ) of the slave robots. In the current study, we define this cross correlation as in

$$CC_{\text{position}} = \frac{\int_0^T \bar{x}(t) \cdot x_{\text{ref}}(t) dt}{\sqrt{\int_0^T \bar{x}^2(t) dt} \sqrt{\int_0^T x_{\text{ref}}^2(t) dt}} \quad (2)$$

to assess the position tracking error across the overall time of maneuvering ( $T$ ).

2) *Maneuverability Performance*: In addition to the conventional approach, maneuverability performance can (and should) take into account the control effort of the operator. From the operator's perspective, it is desirable to achieve equivalent maneuvering accuracy with less control effort. However, the position tracking metric (i.e.,  $CC_{\text{position}}$ ) does not consider this fact. From this perspective, maneuverability is defined in terms of the ease of the operator in maneuvering the slave robot for achieving accurate tracking performance.

To assess this effect, we propose to consider the frequency response profile of the human operator, i.e., the dynamical relationship between the operator's intended force ( $f_h \in \mathbb{R}^3$ ) as the input and the position tracking accuracy ( $CC_{\text{position}}$ ) as the output

$$\Phi_{\text{maneuver}}(s) := \frac{CC_{\text{position}}(s)}{f_h(s)}. \quad (3)$$

In this regard, maneuverability increases when  $f_h$  is reduced and when position tracking  $CC_{\text{position}}$  is increased (i.e., the position tracking error is small).

From this, two additional performance metrics can be derived for maneuverability. First, the  $\pm 3$ -dB bandwidth of  $\Phi_{\text{maneuver}}$  is denoted as  $\omega_{\text{bd}}$ . Second, the  $H_2$  norm of  $\Phi_{\text{maneuver}}$  is denoted as  $\|\Phi_{\text{maneuver}}\|_2$  and defined in

$$\|\Phi_{\text{maneuver}}\|_2 = \left\| W_{\text{low}} \frac{CC_{\text{position}}}{f_h} \right\|_2 \quad (4)$$

where  $W_{\text{low}}$  is a low-pass weighting function with a cutoff frequency  $\omega_c$ . The selection of  $\omega_c$  depends on the specific application of bilateral teleoperation systems. As the normal tremor of a human hand occurs at 8–12 Hz [28],  $\omega_c$  can be less than 8 Hz.

The bandwidth and  $H_2$  norm are useful properties of the system. Respectively, they denote how well the system will track an input and the degree of sensitivity of the system output with respect to its input. Concerning our current evaluation, large values of  $\omega_{\text{bd}}$  and  $\|\Phi_{\text{maneuver}}\|_2$  both indicate high maneuverability performance.

## B. Perceptual Sensitivity

1) *Force Tracking of Master Device*: The force tracking of the master haptic device is measured in terms of how accurately it can track the forces that are transmitted from slave robot(s). This is, generally, evaluated by estimating the discrepancy between the forces of the master and the slave. The force tracking error is defined as

$$e_f(t) := f_m(t) - f_{\text{ref}}(t) \quad (5)$$

where  $f_m(t) \in \mathbb{R}^3$  represents the force input of the master device and  $f_{\text{ref}}(t) \in \mathbb{R}^3$  is the reference force, at time  $t$ . With conventional teleoperation,  $f_{\text{ref}}$  would be replaced by the force exerted on the slaves  $\bar{f}_s = (1/N) \sum_{i=1}^N f_{s,i}(t)$ , where  $f_{s,i}(t) \in \mathbb{R}^3$  represents the force on the  $i$ th slave, by being in contact with its immediate environment.

2) *Perceptual Sensitivity of Human Operator*: Unfortunately, force tracking accuracy is not a sensible measure with regard to the teleoperation of mobile robots (or vehicles, particularly UAVs). As mentioned earlier, UAVs should ideally avoid any direct contact with their environment.

Given that haptic feedback cues should also serve to make human operators sensitive to the remote environment, which is inhabited by the controlled UAVs, it is reasonable to consider sensitivity in terms of their ability to perceptually discriminate between physical differences in the remote environment. For this, it is useful to consider the smallest change in the magnitude of a physical variable (e.g., position, force, and impedance) that can be effectively perceived. Such a measure is commonly referred to as the *just noticeable difference* (JND) [29].

In this paper, JND is estimated from a psychometric function, which is the probabilistic distribution of a human observer's perceptual response across a chosen physical variable (i.e., distance to an obstacle). For this, the JND is defined as

$$JND := \frac{\Delta f_{\text{ref}}}{f_{\text{ref}}} \quad (6)$$

which represents the minimum difference in the reference force that can be effectively perceived by the human operator via force feedback.

From our perspective, the JND is more suitable than force tracking accuracy [see (5)] in understanding how human operators can benefit from haptic force feedback in perceiving the remote environment of the multi-UAVs that they control.

## III. BILATERAL TELEOPERATION OF MULTIPLE UAVS

### A. Teleoperation Control Architecture

In [6], we developed a novel control framework which has three control layers: 1) a UAV control layer, where each UAV is controlled to follow the trajectory of an abstract kinematic virtual point (VP); 2) a VP control layer, which modulates each VP's motion according to the teleoperation commands and local artificial potentials; and 3) a teleoperation layer, through which a remote human user can command the VPs' velocity using a haptic device while haptically perceiving the state of the

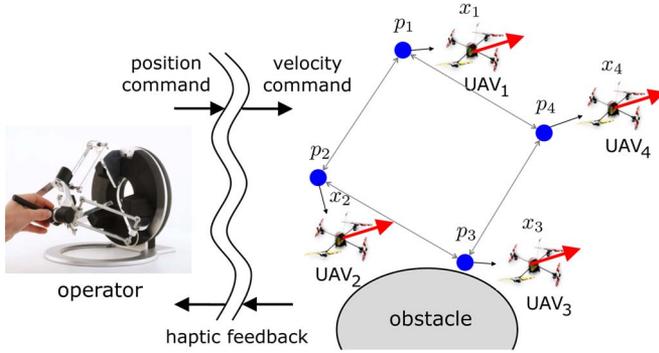


Fig. 1. Haptic teleoperation of multiple UAVs.

UAVs over the Internet. Hereafter, we briefly review the control architecture and refer the reader to [6] for further details.

On the master side (see Fig. 1), we consider a three-degree-of-freedom (DOF) haptic device modeled by

$$M(q)\ddot{q} + C(q, \dot{q})\dot{q} = \tau + f_h \quad (7)$$

where  $q \in \mathbb{R}^3$  is a configuration of the device (e.g., the position of its end effector),  $M(q) \in \mathbb{R}^{3 \times 3}$  is the positive-definite/symmetric inertia matrix,  $C(q, \dot{q}) \in \mathbb{R}^{3 \times 3}$  is the Coriolis matrix, and  $\tau \in \mathbb{R}^3$  and  $f_h \in \mathbb{R}^3$  are the control input and human forces, respectively.

The slave side consists of a group of  $N$  UAVs, and we denote with  $x_i \in \mathbb{R}^3$  the position of a representative point of the  $i$ th UAV, with  $i = 1, \dots, N$ . Define  $p_i : t \in \mathbb{R} \mapsto p_i(t) \in \mathbb{R}^3$  as the desired trajectory to be followed by  $x_i$ . We assume that, by adopting a suitable trajectory-tracking controller, any smooth reference trajectory  $p_i \in C^\infty$  (VP) can be tracked by the representative point  $x_i$  with a small error  $p_i - x_i$ . This assumption holds, for example, if  $x_i$  is a flat output [30] for the considered UAV, i.e., if it algebraically defines, with its derivatives, the state and the control inputs of the  $i$ th UAV. It is well known that both helicopters and quadrotors satisfy this property [31], [32].<sup>1</sup>

We denote with  $\mathcal{N}_i$  the set of UAVs which interact with the  $i$ th UAV (commonly denoted as neighbors in the multirobot literature). The reference trajectory  $p_i$  is generated online by the kinematic evolution

$$\dot{p}_i = u_i^c + u_i^o + u_i^t \quad p_i(0) = x_i(0) \quad (8)$$

where the meaning of the three velocity terms  $u_i^c \in \mathbb{R}^3$ ,  $u_i^o \in \mathbb{R}^3$ , and  $u_i^t \in \mathbb{R}^3$  is here briefly explained.

The contribution of  $u_i^c \in \mathbb{R}^3$  is aimed at achieving a certain 3-D shape formation specified by the desired distances  $d_{ij}^c \forall i = 1, \dots, N$ , and  $\forall j \in \mathcal{N}_i$ , as well as avoiding a collision among UAVs. In particular,  $u_i^c \in \mathbb{R}^3$  creates an attractive action if  $\|p_i - p_j\|$  is large, a repulsive action if  $\|p_i - p_j\|$  is small, and a null action if  $\|p_i - p_j\| = d_{ij}^c$ . Because of the presence of two vertical asymptotes in  $u_i^c$ , corresponding to the minimum and the maximum allowed distances, interrobot collisions are guaranteed to be prevented, and interrobot connectivity is

guaranteed to be preserved (see [6] for a formal proof). For any obstacle point  $p^o$  in the environment, the term  $u_i^o \in \mathbb{R}^3$  implements a repulsive action if  $\|p_i - p^o\|$  is small and a null action for  $\|p_i - p^o\| > D_o$ , where  $D_o \in \mathbb{R}^+$  represents a certain distance threshold. Finally,  $u_i^t \in \mathbb{R}^3$  represents a desired velocity term directly controlled by the human operator by means of the position of the master device  $q$

$$u_i^t = \lambda q \quad \forall i \quad (9)$$

where  $\lambda \in \mathbb{R}^+$  is a constant scale factor used to match different scales between  $q$  and the UAV desired velocity  $u_i^t$ . The desired shape is exactly achieved only if the sums  $u_i^o + u_i^t$  are the same  $\forall i = 1, \dots, N$  (e.g., if  $u_i^o + u_i^t = 0 \forall i$ ); otherwise, the resulting group shape is a deformed version of the desired one. In this way, the group can automatically adapt to the size of the environment (e.g., by shrinking when the operator pushes it in narrow hallways).

## B. Haptic Feedback Algorithms

We take as a starting point three classes of haptic cues that are typically considered as force feedback sources in conventional teleoperation systems: 1) the mismatch between the command of the master and the execution of the slave in terms of position  $q - x_s$  or velocity  $\dot{q} - \dot{x}_s$  (i.e., the master–slave tracking error); 2) the force measured by a force sensor mounted on the slave in contact with the environment  $f_s$ ; and 3) a linear combination of 1) and 2) [10]. In the frequency domain, these three cases can be summarized by the following expression for the control input force:

$$\tau = -C_p(q - x_s) - K_f f_s \quad (10)$$

where  $C_p = K_p + B_p s$  is the PD transfer function of the position controller and  $K_f$  is the force controller transfer function, with  $K_p$ ,  $B_p$ , and  $K_f$  being diagonal gain matrices [10]. Case 1) corresponds to the situation where  $K_f = 0$  and is commonly referred to as position–position (PP) control or position error feedback. Case 2) is consistent with the situation where  $K_p = B_p = 0$  and is typically referred to as force–position (FP) control or direct force feedback. Finally, case 3), where all the gain matrices are nonzero, is usually denoted as position/force–position (PFP) control. Because of practical reasons such as space limitation, safety, and cost, we did not consider the classes of haptic cues that are based on the force measured on the master side, e.g., position–force and four-channel control [10], [11].

The design of the force feedback control  $\tau$  in (7) originates from these three classes of haptic cues (i.e., PP, FP, and PFP). However, three main adjustments have to be taken into account when transferring these concepts from conventional teleoperation to our case. First, we have several slaves instead of only one; hence, the haptic cue in our case must depend on the average of all the UAV contributions. Second, the master–slave tracking error defined earlier cannot be directly applied given that the desired velocity for the group is proportional to  $q$  rather than  $\dot{q}$ . Therefore, we define the master–slave tracking error in our case as  $q - (1/\lambda N) \sum_{i=1}^N \dot{x}_i$ . Third, there is no real

<sup>1</sup>We refer the interested reader to [33] and [34] for the description of some trajectory trackers for the quadrotor case.

contact force acting on the slave side; therefore, we replace  $f_s$  with the (scaled) average of the velocity terms due to obstacle avoidance  $(1/\lambda N) \sum_{i=1}^N u_i^o$ , which plays the role of a repulsing force for the desired trajectory. Note that, while the tracking error is directly influenced by the real UAV states (owing to the presence of  $x_i$ ), the obstacle force is only a function of the desired trajectory, particularly of  $u_i^o$ .

With these considerations in mind, we define our force feedback control as

$$\tau = -B\dot{q} - Ky \quad (11)$$

where  $B \succ 0$  and  $K \succ 0$  are diagonal gain matrices,  $-B\dot{q}$  represents a damping term whose role is to stabilize the haptic device, and  $y \in \mathbb{R}^3$  represents a haptic cue informative of the environment surrounding the UAVs and of the UAV motion states. In direct relation with the aforementioned PP, FP, and PFP classes, we consider the following choices for the signal  $y$ .

1) *Force-Cue Feedback (Force)*:

$$y = y_F := \frac{1}{\lambda N} \sum_{i=1}^N u_i^o. \quad (12)$$

This haptic cue is the counterpart of the FP class and plays the role of a repulsive force from the environment w.r.t. the current position of the reference trajectory for the UAV (*environmental force*). It is only related to the difference between the positions where the UAVs are supposed to go and the location of obstacles. Therefore, it is not related to the actual positions of the UAVs or to any real contact of the UAVs with their environment.

2) *Velocity-Cue Feedback (Velocity)*:

$$y = y_V := q - \frac{1}{\lambda N} \sum_{i=1}^N \dot{x}_i. \quad (13)$$

This haptic cue corresponds to the PP class and represents the mismatch between the commanded velocity [specified by  $q$  in (9)] and the average velocity of real UAVs (*tracking error*). The mismatch can be caused by the following reasons: 1) inaccurate model of the UAV, imprecise parameter calibration (e.g., mass of the UAV), or poor quality of the trajectory tracker; 2) external disturbances on the UAV motion (e.g., wind, friction, and actual contact with the environment); and 3) nonzero velocity terms  $u_i^o + u_i^t$ ,  $i = 1, \dots, N$ , in the trajectory generator (8), due to the presence of obstacles closer than  $D_o$  to the group. Therefore, this haptic cue provides the operator more information compared to the previous case. Note that the *Velocity* cue also includes the *Force* cue, albeit “filtered” by the dynamical behavior of the real UAV positions/velocities rather than directly taken from the desired trajectory.

The third and last case is the counterpart of the PFP class and linearly combines the previous two cues.

3) *Velocity-Plus-Force-Cue Feedback (Velocity+Force)*:

$$y = y_V + y_F. \quad (14)$$

We end the section with some final considerations. If the UAVs are maneuvered close to the obstacles, both  $y_V$  and  $y_F$

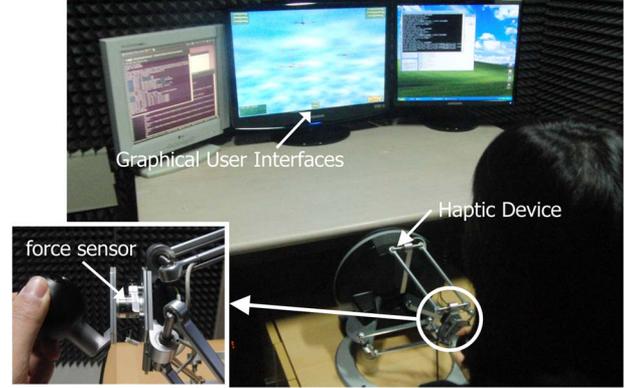


Fig. 2. Experimental setup. Subject with a haptic device (Omega 3) and graphical user interfaces.

are nonzero. In fact, some of the  $u_i^o$ ,  $i = 1, \dots, N$ , will be nonzero, implying the following: 1)  $y_F \neq 0$  by definition, and 2) the reference trajectory (and consequently the UAVs) is not following exactly the operator commands represented by the term  $u_i^t = \lambda q$ . If the velocity term due to the obstacles and the other two terms in (8) are exactly balancing (they sum up to zero) and, consequently, the UAV is stationary, then  $y_F \simeq y_V$ . Finally, if the UAV is moving far away from the obstacles in the environment, then  $y_F = 0$  while  $y_V$  is, in general, nonzero because of all the aforementioned reasons (external disturbances, inaccurate calibration, poor trajectory tracker, contact with an unperceived object, etc.).

## IV. GENERAL EXPERIMENTAL METHODS

### A. Participants

Thirty-two participants (25 males; age range: 20–33 years) from Korea University, Seoul, Korea, were paid approximately 20 USD to take part in this study, which consisted of four experiments on maneuverability and perceptual sensitivity for low and large control gains. Five participants took part in all four experiments, while the rest took part in at least one experiment. There were 18 participants for each experiment. All participants possessed normal or corrected-to-normal eyesight and no physical disability. The experiments were conducted in accordance with the requirement of the Declaration of Helsinki.

### B. Apparatus

The apparatus mainly consisted of a central display and a haptic device. The former presented a virtual environment for a swarm of four UAVs whose flight path could be controlled by the latter (see Fig. 2).

This multi-UAV swarm always assumed a tetrahedron formation in this virtual environment, with an inter-UAV distance of approximately 0.8 m. The UAV dynamics and control logic were simulated in a custom-made simulation environment that was based on the Ogre3D engine (for 3-D rendering and computational geometry computations), with PhysX libraries to simulate the physical interaction between the UAVs and their

virtual environment. This simulation was updated at 60 Hz which, in turn, constrained the data exchange rate between the haptic device and virtual UAVs. In the display, the simulated UAVs and environment were rendered from a camera perspective that was 32 m (and 8 m) away from the starting positions of the UAVs for the maneuverability (and the perception experiment, respectively), with a FOV of about 21°. This rendered scene was presented via the center display monitor.

The UAV swarm was controlled by a commercial haptic device (Omega 3, Force Dimension). The Omega 3 is a three-DOF haptic device with three translational actuated axes and a local control loop running at about 2.5 kHz on a dedicated Linux machine. In addition, ATI six-axis force/torque sensors, Nano17, were attached to the Omega 3 device to measure the force that the human operator exerted on the device during experimentation, as shown in Fig. 2.

Finally, instructions on manipulating the haptic device and the experimental procedure were presented on the left and right monitors, respectively.

### C. Data Analysis

Three measures served as performance metrics for maneuverability in our evaluation study, according to our description in Section II-A. To recap,  $CC_{\text{position}}$  (in percent) in (2) represents the similarity of the executed path to the desired path.  $\omega_{\text{bd}}$  and  $\|\Phi_{\text{maneuver}}\|_2$  represent the bandwidth and  $H_2$  norm of the maneuverability frequency response [ $\Phi_{\text{maneuver}}$  in (3)]. These measures were separately computed for the  $x$ - and  $y$ -axis components of the executed path. In fact, the dynamics of the quadrotors along the  $y$ -axis are faster than those along the  $x$ -axis for mechanical reasons. Thus, there were six performance metrics for maneuverability. In our study,  $\Phi_{\text{maneuver}}$  was measured as the experimental frequency response of the haptic teleoperation system of multi-UAVs shown in Fig. 2. This considered as input the human operational force to the haptic device ( $f_h$ ), calculated as

$$f_h(t) = f_m(t) - \tau(t) \quad (15)$$

where  $f_m$  is the force that was measured from the force sensor on the haptic device and  $\tau$  is the master control force given by the current haptic feedback algorithm. The output is  $CC_{\text{position}}$  treated in percentage [see (2)]. With both variables, it was possible to calculate  $\Phi_{\text{maneuver}}$  by applying the empirical transfer function estimator [35], using a second-order low-pass filter ( $W_{\text{low}}$ ) with a cutoff frequency of 8 Hz [see (4)].

Psychometric functions were fitted, in the perception experiment, to the collected data to assess each participant for their discrimination sensitivity, given a particular haptic cue. They were derived using the *psignifit* toolbox for Matlab which implements the maximum-likelihood method described in [36]. Discrimination sensitivity was measured as the difference of the stiffness values between the 16th and 84th percentiles of the psychometric function. This value was referred to as the JND and denotes the difference in stimulus intensity that participants were able to reliably detect over one standard deviation

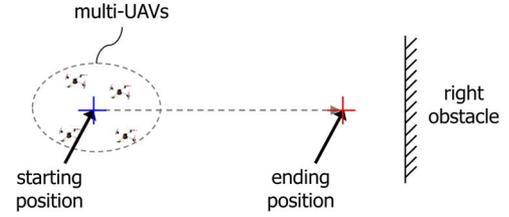


Fig. 3. Sketch of the tuning procedure of the control parameters.

around the point of subject equality.<sup>2</sup> A smaller value indicates greater sensitivity in discrimination, i.e., better environmental awareness.

In the maneuverability and perception experiments, all performance metrics were submitted to a one-way repeated-measure analysis of variance for the factor of haptic feedback algorithms (*Velocity*, *Force*, and *Velocity+Force* cues).<sup>3</sup> An alpha level of 0.05 was taken to indicate statistical significance. When a main effect was found, *post hoc t-tests*<sup>4</sup> were conducted among the haptic feedback algorithm conditions to identify those which were significantly different from each other in terms of the relevant performance metrics.

### D. Selection of Control Parameters

The magnitude of the force feedback is expected to be strongly influenced by the control parameters (gains)  $K$  and  $B$  which were defined for our force feedback control in (11) with the haptic cues in (12) (*Force* cue), (13) (*Velocity* cue), and (14) (*Velocity+Force* cue). Here, for a fully fair comparison of the performances of the proposed haptic feedback algorithms, the control parameters were tuned to produce the same magnitude of force to the operator.

The multi-UAVs, in a tuning procedure, were maneuvered from a starting position to an ending position located in front of an obstacle as shown in Fig. 3. The UAVs, then, were stopped at the ending position over 5 s. During this operation,  $f_m$  was measured using the force sensor mounted on the haptic device.

Details of this tuning procedure are reported in the following: First, we fixed the gains as  $K = 50$  N/m and  $B = 2$  N · s/m for the *Force* cue. Then, keeping this condition as reference, the gains were tuned for the cases of the *Velocity* and the *Velocity+Force* cues to produce the same force as in the *Force* cue case. This tuning procedure was performed in four cases depending on the position of the obstacles relative to the multi-UAVs, i.e., obstacles located on the right side, left side, upper side, and down side (see Fig. 3). The values of the tuned control parameters are  $K = 50$  N/m and  $B = 2$  N · s/m for the *Velocity* cue while  $K = 30$  N/m and  $B = 2$  N · s/m for the *Velocity+Force* cue. Hereafter, this parameter set will be referred to as low gain. Note that the damping parameter  $B$  was not included in the tuning to maintain the same motion agility of the UAVs and the same stability performance based on the passive-set-position-modulation algorithm [37].

<sup>2</sup>This is the value of relative intensity of stimuli for which the test stimuli are perceived to be equal to the reference stimuli.

<sup>3</sup>Greenhouse–Geisser corrections were applied for instances of unequal variances.

<sup>4</sup>Bonferroni corrected.

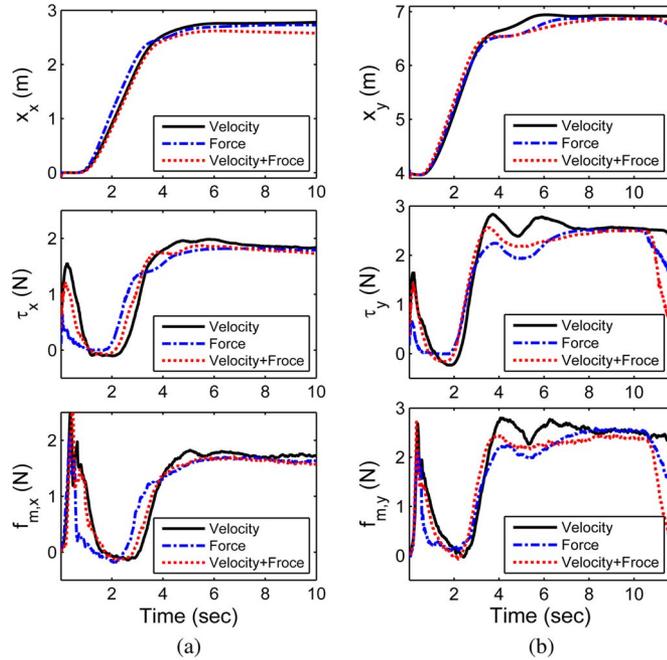


Fig. 4. Experimental results of control parameter tuning. (a) With right-side obstacle. (b) With upper-side obstacle.

The experimental results using the tuned control parameters are shown in Fig. 4. The plots are averages of repeated five experiments. The first row in Fig. 4 shows the trajectories of the center position of the multi-UAVs. The UAVs were operated along the same path with all haptic feedback algorithms. The master control force  $\tau$  is shown in the second row. As expected, the magnitude of  $\tau$  at steady state keeps similar across the various conditions despite small difference due to transient phases. We can also verify that the operator received very similar forces for all haptic feedback algorithms from the measured force  $f_m$  shown in the third row in Fig. 4.

Another parameter set was also tested to analyze the effect of control parameters on the system performance. This is defined as  $K = 70$  N/m and  $B = 2$  N · s/m for all *Velocity*, *Force*, and *Velocity+Force* cues and, hereafter, will be referred to as large gain.

## V. EXPERIMENT 1: EVALUATION OF MANEUVERABILITY

The purpose of this experiment was to evaluate how maneuverability performance varied in response to the proposed haptic cue algorithms, in accordance to the proposed performance measures.

### A. Procedure

In this experiment, participants were required to maneuver a swarm of UAVs, using the haptic control device. The objective was always to follow a moving target. This moving target preceded the UAV swarm and moved along a preassigned path, which was either straight or curved (see Fig. 5 and [38] for details). Prior to experimentation, the participants were given a detailed tutorial about the experiment and were provided a training session with the Omega 3 for about 10 min to get them familiarized with the haptic device and the procedure.

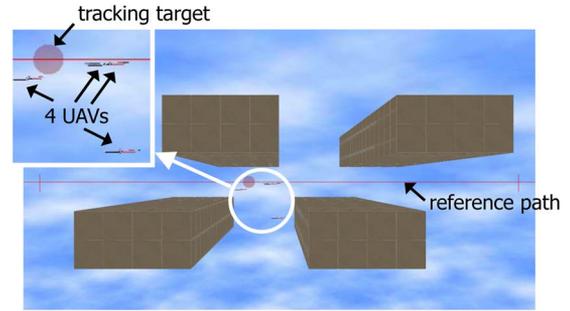


Fig. 5. Screen shot of the maneuverability experiment with visible reference path and obstacles, which were rendered invisible during the actual experiment.

The full experiment was separated into three blocks of 25 trials each. Each block of trials was defined by the design of the haptic cue that provided feedback to the participant, namely, the *Velocity*, *Force*, and *Velocity+Force* cues.

On each trial, participants were presented with one of three possible scenarios for UAV maneuvering: five, ten, and ten trials for scenario 1 (a straight path with no bounding obstacles), for scenario 2 (a straight path that was bounded by four obstacles), and for scenario 3 (a curved path which was bounded by four obstacles), respectively. These scenarios were featured in all of the blocks and were fully randomized within the block for their presentation order. It should be noted that the obstacles, as well as the reference path, were invisible during the experiment to minimize any influence of visual feedback. Only the UAVs and moving targets were visible during the experiment. Finally, the presentation order of the blocks was fully counterbalanced across the participants, to minimize the influence of practice and order effects on our findings.

### B. Results

Figs. 6–8 show summaries of performance in this maneuvering experiment. The performances on the three different scenarios were independently analyzed, for low and large values of gain. The results are reported in the following sections.

1) *Scenario 1—Straight Path With No Obstacles*: With low gain values, the haptic cue conditions did not significantly differ on any of the performance measures for maneuverability. On the other hand, with large gain values, the *Force* cue condition yielded significantly larger  $\|\Phi_{\text{maneu}}\|_2$  values compared to the *Velocity+Force* condition [38].

Direct comparisons between the low- and large-gain conditions of each haptic cue indicated the following. There was no significant difference on any performance measure for the *Velocity* cue. For the *Force* cue, larger gains significantly increased the values of  $\|\Phi_{\text{maneu}}\|_2$  for both the horizontal and vertical components ( $t_{34} = 2.55$  and  $p < 0.05$ , and  $t_{34} = 2.23$  and  $p < 0.05$ , respectively). In the case of the *Velocity+Force* cue, larger gains significantly decreased the value of  $\omega_{\text{bd}}$  ( $t_{34} = 2.42$  and  $p < 0.05$ ).

2) *Scenario 2—Straight Path With Obstacles*: As reported in [38], with large gain, the *Force* cue yielded significantly higher performance compared to the *Velocity* and *Velocity+Force* cues for both the horizontal and vertical components. With low gain values, however, the haptic cue conditions

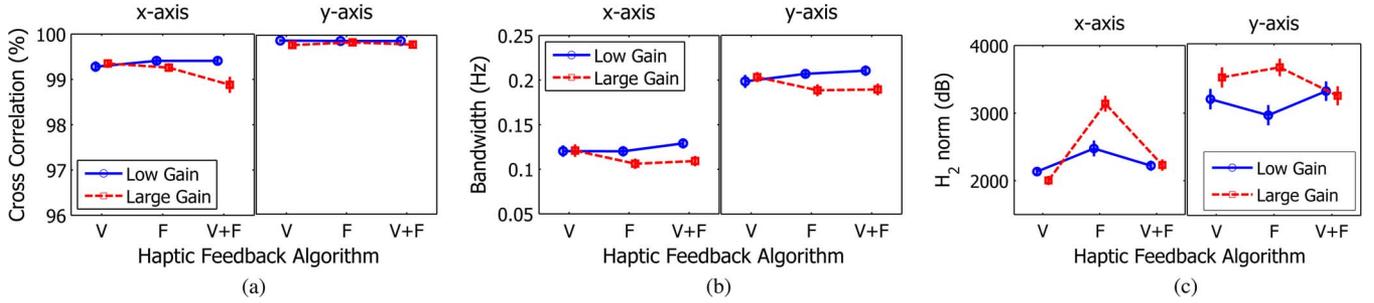


Fig. 6. Maneuverability performance in scenario 1. The figures are plotted as *median*  $\pm$  *standard error*. (a) Cross correlation of the position tracking  $CC_{\text{position}}$  (in percent). (b) Bandwidth of the maneuverability  $\omega_{\text{bd}}$ . (c)  $H_2$  norm of the maneuverability  $\|\Phi_{\text{maneuver}}\|_2$ .

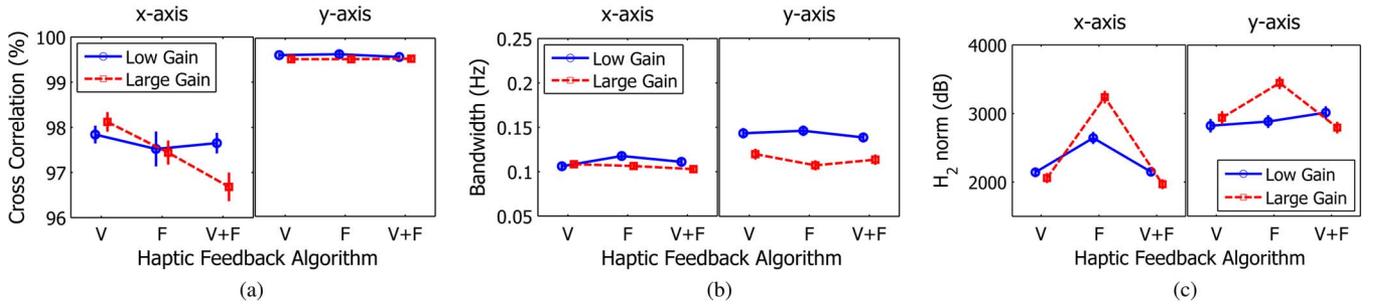


Fig. 7. Maneuverability performance in scenario 2. The figures are plotted as *median*  $\pm$  *standard error*. (a)  $CC_{\text{position}}$  (in percent). (b)  $\omega_{\text{bd}}$ . (c)  $\|\Phi_{\text{maneuver}}\|_2$ .

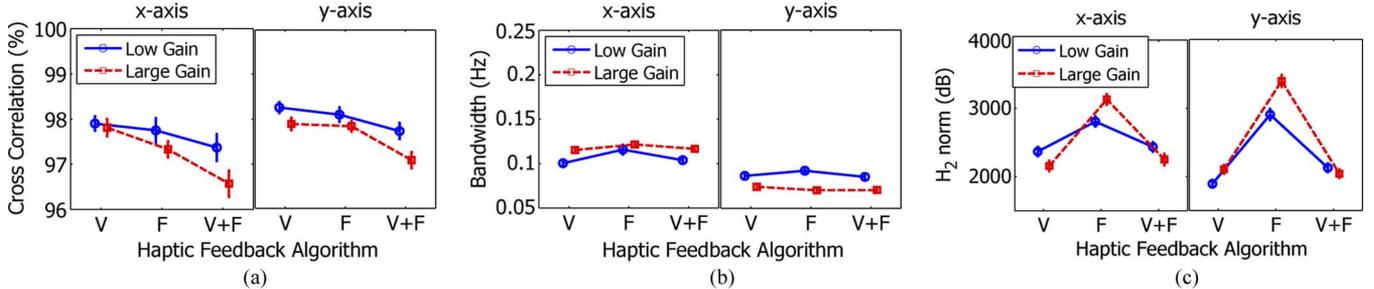


Fig. 8. Maneuverability performance in scenario 3. The figures are plotted as *median*  $\pm$  *standard error*. (a)  $CC_{\text{position}}$  (in percent). (b)  $\omega_{\text{bd}}$ . (c)  $\|\Phi_{\text{maneuver}}\|_2$ .

significantly differed on the measure of  $\|\Phi_{\text{maneuver}}\|_2$ , for the horizontal component of flight ( $F_{2,34} = 24.3$  and  $p < 0.001$ ), but not on the other measures. Specifically, the *Force* cue yielded significantly higher  $\|\Phi_{\text{maneuver}}\|_2$  values, relative to both *Velocity* and *Velocity+Force* cues.

Direct comparisons between the low- and large-gain conditions of each haptic cue indicated the following. There was no significant difference on any performance measure for the *Velocity* cue. Increasing the gain for the *Force* cue significantly increased the values of  $\|\Phi_{\text{maneuver}}\|_2$  for both the horizontal and vertical components ( $t_{34} = 2.73$  and  $p < 0.05$ , and  $t_{34} = 2.35$  and  $p < 0.05$ , respectively). In addition, doing so significantly decreased  $\omega_{\text{bd}}$  on the vertical component ( $t_{34} = 3.68$  and  $p < 0.01$ ). Lastly, increasing the gain for the *Velocity+Force* cue significantly decreased  $\omega_{\text{bd}}$  on the vertical component ( $t_{34} = 2.22$  and  $p < 0.05$ ).

3) *Scenario 3—Curved Path With Obstacles*: With low gain values, the haptic cue conditions significantly differed on the measure of  $\|\Phi_{\text{maneuver}}\|_2$ , for both the horizontal and vertical components of flight ( $F_{2,34} = 6.38$  and  $p < 0.01$ , and  $F_{2,34} =$

$27.46$  and  $p < 0.001$ , respectively), but not on the other measures. In both instances, the *Force* cue yielded significantly higher values compared to both *Velocity* and *Velocity+Force* cues. With large gain values, the haptic cue conditions significantly differed on the measures of  $CC_{\text{position}}$  and  $\|\Phi_{\text{maneuver}}\|_2$ . With regard to  $CC_{\text{position}}$ , the *Velocity* cue yielded significantly higher values than the *Velocity+Force* cue. However, with regard to  $\|\Phi_{\text{maneuver}}\|_2$ , the *Force* cue yielded higher values than both *Velocity* and *Velocity+Force* cues.

Direct comparisons between the low- and large-gain conditions of each haptic cue indicated the following. For the *Velocity* cue, larger gains induced significantly larger  $\omega_{\text{bd}}$  on the horizontal component ( $t_{34} = 2.43$  and  $p < 0.05$ ) and smaller  $\omega_{\text{bd}}$  on the vertical component ( $t_{34} = 2.23$  and  $p < 0.05$ ). Also, it resulted in significantly larger  $\|\Phi_{\text{maneuver}}\|_2$  in the vertical component ( $t_{34} = 2.00$  and  $p < 0.05$ ). For the *Force* cue, larger gains induced significantly larger  $\|\Phi_{\text{maneuver}}\|_2$  in the vertical component ( $t_{34} = 3.73$  and  $p < 0.001$ ). Lastly, increasing the gain for the *Velocity+Force* cue induced significantly reduced  $\omega_{\text{bd}}$  on the vertical component ( $t_{34} = 2.19$  and  $p < 0.05$ ).

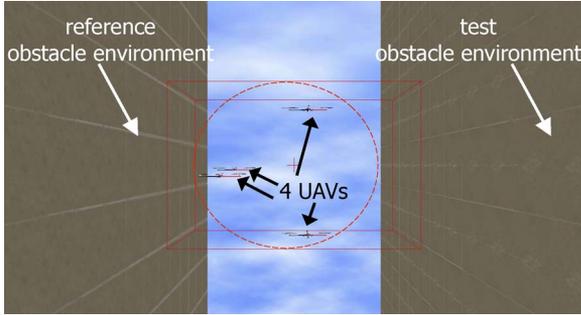


Fig. 9. Screen shot of the test of perceptual sensitivity evaluation with visible obstacles, which were rendered invisible during the actual experiment.

### C. Discussion

In general, the *Force* cue algorithm for haptic feedback consistently yields better maneuverability performance than the *Velocity* algorithm as well as the *Velocity+Force* algorithm. This is demonstrated for the measure of  $\|\Phi_{\text{maneuver}}\|_2$  across the three tested scenarios. The results show that the operator required less force to achieve the same level of maneuvering accuracy when the *Force* cue feedback was implemented. Broadly speaking, this advantage of using the *Force* cue feedback is more pronounced with the larger values of gain and when obstacles were present. Therefore, the *Force* cue feedback affords greater sensitivity in the transfer from the input force to tracking accuracy. In other words, less control effort is required on the part of the operator in achieving the same level of tracking accuracy with the *Force* cue.

With regard to tracking accuracy itself, the measure of  $CC_{\text{position}}$  was less sensitive as a performance measure of maneuvering accuracy. It only revealed distinctions between the haptic feedback algorithms with large gain values and only in the presence of obstacles. When significant differences were revealed, the *Velocity* cue feedback proved to be significantly better than the *Velocity+Force* cue feedback, but not the *Force* cue feedback.

Finally, varying gain values tended to influence the bandwidth ( $\omega_{\text{bd}}$ ) of the frequency response profile. Larger gain values typically corresponded with lower  $\omega_{\text{bd}}$ , particularly for the *Velocity+Force* cue, although it can be apparent on all algorithm types.

## VI. EXPERIMENT 2: EVALUATION OF PERCEPTUAL SENSITIVITY

The purpose of this experiment was to evaluate how the operator's perceptual sensitivity of obstacles in the multi-UAVs' (remote) environment could be influenced by the proposed haptic cue algorithms.

### A. Procedure

In this experiment, participants were presented with a swarm of four UAVs on each trial, which were located between two invisible obstacles (see Fig. 9). Their tasks were to move the multi-UAV swarm toward the direction of the obstacles and to determine which of the two obstacles returned a stiffer response

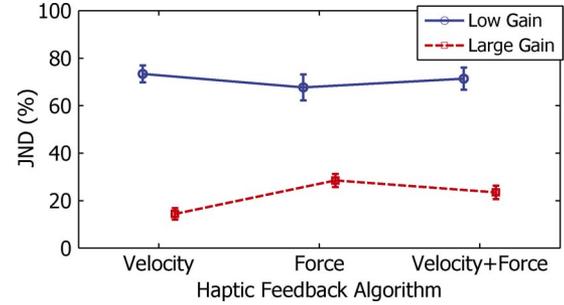


Fig. 10. Summary of JNDs across the haptic cue conditions plotted as median  $\pm$  standard error.

on the haptic control device. Participants indicated the stiffest among the two obstacles by using a mouse to click on one of two possible buttons that were located at the left or right position of the screen, which corresponded to the respective positions of the obstacles.

The experiment was divided into three blocks of trials for the three haptic cues. The presentation order of these blocks was counterbalanced across the participants, so as to minimize practice effects.

Throughout the experiment, one obstacle was held at a constant stimulus level (distance: 3.4 m) while the other differed from this reference wall across seven levels of relative stimuli, from 50% to 150% in equal steps, by the method of constant stimuli [29]. The positions of the obstacles, relative to each other, were counterbalanced throughout the experiment, and there were ten trials for each level of tested difference, resulting in a total of 70 trials per block. These trials were completely randomized for presentation order. Instructions were provided prior to experimentation, as well as a practice session, to ensure good performance during testing like experiment 1. Each trial took approximately 20 s to complete, and 10-min breaks were provided between the blocks of trials. The entire experiment took 90 min to perform.

It is important to reiterate that only the UAVs were visible to the observer. We rendered the obstacles invisible to minimize any possible influence of visual feedback on our participants' discrimination responses like experiment 1. This allowed us to specifically address the influence of our haptic cue feedback.

### B. Results

The experimental results are summarized in Fig. 10. Smaller JND values indicate greater perceptual sensitivity to the haptic cue condition.

There was no significant main effect of the haptic cue condition with low gains ( $F_{2,34} = 0.49$  and  $p > 0.05$ ). However, there was a significant main effect of the haptic cue condition when larger gains were applied as reported in [39]. Here, the participants were significantly more sensitive to haptic feedback forces that were based on the *Velocity* information of remote UAVs, or cues, compared to the *Force* cue feedback.

Direct comparisons between the low- and large-gain conditions of each haptic cue revealed significant difference for all the haptic conditions (*Velocity* cue:  $t_{34} = 13.7$  and  $p < 0.001$ ; *Force* cue:  $t_{34} = 6.4$  and  $p < 0.001$ ; *Velocity+Force* cue:  $t_{34} =$

8.7 and  $p < 0.001$ ). Thus, larger gains in haptic feedback result in higher perceptual sensitivity, regardless of haptic cue design.

### C. Discussion

Generally, participants are more sensitive to haptic forces with larger gains. This is to be expected. However, it is important to note that gains should not be indiscriminately increased. In our current scenario, the application of the same gain magnitudes resulted in differential improvements across the three haptic cue designs.

With larger gains, the *Force* cue feedback fared comparably worse to the *Velocity* cue feedback. In this regard, at least, our current findings contradict conventional scenarios of teleoperation control (e.g., [22]). With conventional teleoperation, it has been argued that force information tends to bring about better perceptual awareness [22]. This, however, may not be the case with UAVs wherein force information is not sensed directly and has to be contrived. The current design of obstacle avoidance force [ $u_i^o$  in (8)] as well as the connectivity preservation force [ $u_i^c$  in (8)] both affect the operator's perception performance. It is clear that this particular design can be further improved in order to bring about better perceptual sensitivity.

Finally, the utility of the *Velocity+Force* cue is mixed across our participants. Some participants appear to be most sensitive to its generated feedback, while other participants are least sensitive to it. It is possible that our participants were unable to intuitively interpret haptic feedback that was contrived from two sources of information, and while some preferred the *Velocity+Force* cue which is presumably richer in information, others construed this as being confounding or inconsistent.

## VII. GENERAL DISCUSSION

### A. Maneuverability

The *Force* cue results in multi-UAV control that requires less effort. This is because the *Force* cue feedback is absent during free motion. In contrast, the *Velocity* cue is absent only when UAVs move with a constant velocity vector, which rarely happens. Therefore, the latter case constantly requires the operator to counterbalance the UAVs' felt inertia in order to obtain the desired motion.

The current approach of considering the frequency response profile of the human operator proved to be important in distinguishing between our haptic cue designs for maneuvering performance. Our approach highlighted the specific aspect by which the *Force* cue differed from its *Velocity* counterpart. It is important to note that the measure of tracking accuracy, which is the more conventional measure of maneuverability (e.g., [13] and [14]), did not discriminate between the haptic cue designs across our experimental scenarios. With this in mind, future studies should consider adopting the current approach in assessing maneuvering performance.

Evaluating maneuvering performance in terms of the operator's frequency response need not be restricted to the force input of the operator's motor command and the output of the tracking accuracy. For example, other behavioral inputs that are relevant

to maneuvering efficiency can be modeled in lieu of  $f_h$  [see (15)]. This could include measured stress levels or cognitive workload. Aside from the human operator, the same approach could provide additional insight into the relationship of the parameters of haptic controllers and the desired maneuverability outcome. Similarly, the desired output could be described in terms of other equally desirable objectives besides tracking accuracy (e.g., system stability, velocity, and force tracking).

Another point that is worth noting is that our current measurement of  $f_h$  consists of both the voluntary motor commands of the operator ( $f_h^{\text{active}}$ ) and the forces that result from the operator's involuntary musculoskeletal reflexes to movements in the haptic device ( $f_h^{\text{response}}$ ). Although it was not feasible to discriminate between the two in our current study, future work could address this distinction by obtaining direct measurements from the brain (e.g., using electroencephalography [40]) which, like  $f_h^{\text{active}}$ , could represent the voluntary input of the operator. Alternatively,  $f_h^{\text{response}}$  could be estimated from an appropriate dynamic model (e.g., quasi-linear second-order model [41]) of the wrist or elbow joint as well as from direct measurements of the skeletal muscles (e.g., using electromyography [42]). With this,  $f_h^{\text{active}}$  could be calculated by discounting the estimated  $f_h^{\text{response}}$  from the measured  $f_h$ .

Finally, a moving target was used in our current study to explicitly indicate the desired control path. Nonetheless, operators might vary in terms of what they might individually consider to be desirable control paths, particularly for increasingly complex paths. Eye-tracking measurements of where the operators are fixating during UAV control could indicate the intended target destination. We intend to address this in a subsequent study and, in doing so, estimate free UAV control in the absence of explicit instruction.

### B. Perceptual Sensitivity

Perceptual awareness of the remote environment via haptic feedback is important, particularly for obstacle avoidance. In our current framework, the presence of proximal obstacles is rendered more detectable by haptic feedback that is based on the UAVs' velocity information, relative to force information. This is important to note, particularly for instances where visual feedback is degraded or simply unavailable.

Full visual information was provided to our participants throughout the current experiments. In the real world, however, such information is unlikely to be readily available due to the limitations of onboard camera (e.g., restricted FOV and poor camera resolution) [8], [9] or the external disturbances (e.g., dust, smoke, or steam on the camera) [43]. Even if visual information can be effectively captured, the data volume that has to be transmitted will be considerably more than that which is sufficient for fabricated force cues.

With this in mind, the extra effort that is required when *Velocity* cues are employed for multi-UAV control might be justifiable in situations that require participants to be highly aware of nearby objects. Such a situation could be when multi-UAVs are used to probe the spatial layout of an environment, for example, search-and-rescue scenarios of enclosed spaces.

### C. Selection of Control Parameters

The current study also investigated how performance benefits from haptic feedback cue related with the control parameter of gain (i.e.,  $K$ ). The results of the experiments were unequivocal. Large gain values are necessary in order for haptic feedback cues to have a noticeable effect on performance. The positive contribution of the *Force* cue to maneuvering performance particularly benefited from larger gain values [see Figs. 6(c)–8(c)]. Nonetheless, it would be wrong to assume that larger feedback forces will automatically deliver improved human performance.

In fact, the largest force feedback was quantitatively returned by the *Velocity+Force* cue with large gains. However, the *Velocity+Force* cue consistently returned poor performance, for the evaluations of both maneuvering and perceptual sensitivity. In addition, increasing gain values can result in a decrease in the bandwidth of the frequency response profile of maneuvering performance. In other words, larger gain values can decrease the effectiveness of the system in tracking the operator's control input.

Subsequent research would be necessary in investigating the functional relationship between gain values of haptic force feedback and human performance. This will be useful in determining optimal gain values for the various haptic cue designs.

## VIII. CONCLUSION

In this paper, we have presented a framework that supports the transmission of haptic cues from the controlled UAVs to the teleoperator's controller. Haptic cues can be designed to increase the teleoperator's maneuvering performance of the UAVs and perception of the remote environment. For this purpose, we have proposed three possible types of haptic cues and three complementary teleoperation controllers based on well-known conventional teleoperation control. These three designs were based on the following: 1) the UAVs' obstacle avoidance force; 2) the UAVs' velocity information; and 3) a combination of the two.

In addition, we have proposed metrics for assessing maneuverability performance, which takes into account the human operator's control effort during bilateral teleoperation. With respect to this, we found  $H_2$  norm to be a more reliable measure than the more conventional measure of position tracking accuracy (e.g., [13] and [14]). More importantly, this allowed for a more comprehensive assessment of maneuvering performance. We were able to determine that the *Force* cue feedback algorithm resulted in better maneuvering performance, in the sense that teleoperators were able to achieve equivalent steering of the remote UAVs with significantly less control effort. On the other hand, we have proposed JND for assessing the operator's perception ability on the environment instead of conventional force tracking accuracy (e.g., [10] and [11]). With the JND, the operator's perception is evaluated better than in the conventional way from the human perspective: The perception performances with the three haptic feedback algorithms could be compared by using discrimination tasks and measuring the JND. Contrary to the maneuverability case, the results showed

that the *Velocity*-cue-based haptic feedback algorithm was the best (statistically significant).


Maneuverability performance and perceptual awareness are equally important qualities during bilateral teleoperation. In light of this, the appropriate haptic feedback algorithm ought to be selected according to the application and the objective of the operator. The current evaluation of fabricated haptic cues for their influence on performance should allow us to design better algorithms for controlling multiple UAVs. Given that our control framework allows for the joint control of multiple robots with a single input, we can expect our findings to generalize to the teleoperation of single robots (e.g., mobile robot [9] and UAV [44]).

Ultimately, the appeal of this study lies in the fact that it allows performance of the human operator to be quantified in a manner that can be integrated into control systems. This will motivate subsequent research that seeks to enhance the overall performance of control systems from the human perspective with an optimization in design and selection of the system parameters by using the proposed metric and psychophysical evaluation.

## REFERENCES

- [1] R. Beekers, O. Holland, and J. Deneubourg, "From local actions to global tasks: Stigmergy and collective robotics," in *Artificial Life IV*. Cambridge, MA: MIT Press, 1994, pp. 181–189.
- [2] C. Jones, D. Shell, M. Mataric, and B. Gerkey, "Principled approaches to the design of multi-robot systems," in *Proc. Workshop Netw. Robot., IEEE/RSJ Int. Conf. Intell. Robots Syst.*, 2004, pp. 71–80.
- [3] K. P. Valavanis and K. P. Valavanis, *Advances in Unmanned Aerial Vehicles: State of the Art and the Road to Autonomy*. New York: Springer-Verlag, 2007.
- [4] E. Rodriguez-Seda, J. Troy, C. Erignac, P. Murray, D. Stipanovic, and M. Spong, "Bilateral teleoperation of multiple mobile agents: Coordinated motion and collision avoidance," *IEEE Trans. Control Syst. Technol.*, vol. 18, no. 4, pp. 984–992, Jul. 2010.
- [5] D. Lee, "Passive decomposition and control of nonholonomic mechanical systems," *IEEE Trans. Robot.*, vol. 26, no. 6, pp. 978–992, Dec. 2010.
- [6] D. Lee, A. Franchi, P. Robuffo Giordano, H. I. Son, and H. H. Bühlhoff, "Semi-autonomous haptic teleoperation of multiple unmanned aerial vehicles over the Internet," in *Proc. IEEE Int. Conf. Robot. Autom.*, May 2011, pp. 1341–1347.
- [7] A. Franchi, P. Robuffo Giordano, C. Secchi, H. I. Son, and H. H. Bühlhoff, "A passivity-based decentralized approach for the bilateral teleoperation of a group of UAVs with switching topology," in *Proc. IEEE Int. Conf. Robot. Autom.*, May 2011, pp. 898–905.
- [8] J. McCarley and C. Wickens, "Human factors implications of UAVs in the national airspace," Aviation Human Factors Division, Savoy, IL, Technical Rep. AHFD-05-05/FAA-05-01, 2005.
- [9] N. Diolaiti and C. Melchiorri, "Teleoperation of a mobile robot through haptic feedback," in *Proc. IEEE Int. Workshop HAVE*, 2002, pp. 67–72.
- [10] K. Hashtrudi-Zaad and S. E. Salcudean, "Analysis of control architectures for teleoperation systems with impedance/admittance master and slave manipulators," *Int. J. Robot. Res.*, vol. 20, no. 6, pp. 419–445, Jun. 2001.
- [11] D. Lawrence, "Stability and transparency in bilateral teleoperation," *IEEE Trans. Robot. Autom.*, vol. 9, no. 5, pp. 624–637, Oct. 1993.
- [12] K. Fite, L. Shao, and M. Goldfarb, "Loop shaping for transparency and stability robustness in bilateral telemanipulation," *IEEE Trans. Robot. Autom.*, vol. 20, no. 3, pp. 620–624, Jun. 2004.
- [13] I. Aliaga, A. Rubio, and E. Sanchez, "Experimental quantitative comparison of different control architectures for master-slave teleoperation," *IEEE Trans. Control Syst. Technol.*, vol. 12, no. 1, pp. 2–11, Jan. 2004.
- [14] Y. Yokokohji and T. Yoshikawa, "Bilateral control of master-slave manipulators for ideal kinesthetic coupling—Formulation and experiment," *IEEE Trans. Robot. Autom.*, vol. 10, no. 5, pp. 605–620, Oct. 1994.
- [15] J. Chen, E. Haas, and M. Barnes, "Human performance issues and user interface design for teleoperated robots," *IEEE Trans. Syst., Man, Cybern. C, Appl. Rev.*, vol. 37, no. 6, pp. 1231–1245, Nov. 2007.

- [16] S. Ito and Y. Yokokohji, "Maneuverability of master control devices considering the musculo-skeletal model of an operator," in *Proc. World Haptics Conf.*, 2009, pp. 57–62.
- [17] M. Nambi, W. Provancher, and J. Abbott, "On the ability of humans to apply controlled forces to admittance-type devices," *Adv. Robot.*, vol. 25, no. 5, pp. 629–650, Mar. 2011.
- [18] M. Çavusoglu, A. Sherman, and F. Tendick, "Design of bilateral teleoperation controllers for haptic exploration and telemanipulation of soft environments," *IEEE Trans. Robot. Autom.*, vol. 18, no. 4, pp. 641–647, Aug. 2002.
- [19] G. De Gersem, H. Van Brussel, and F. Tendick, "Reliable and enhanced stiffness perception in soft-tissue telemanipulation," *Int. J. Robot. Res.*, vol. 24, no. 10, pp. 805–822, Oct. 2005.
- [20] P. Malysz and S. Sirouspour, "Nonlinear and filtered force/position mappings in bilateral teleoperation with application to enhanced stiffness discrimination," *IEEE Trans. Robot.*, vol. 25, no. 5, pp. 1134–1149, Oct. 2009.
- [21] D. Botturi, M. Vicentini, M. Righele, and C. Secchi, "Perception-centric force scaling in bilateral teleoperation," *Mechatronics*, vol. 20, no. 7, pp. 802–811, Oct. 2010.
- [22] H. I. Son, T. Bhattacharjee, and H. Hashimoto, "Enhancement in operator's perception of soft tissues and its experimental validation for scaled teleoperation systems," *IEEE/ASME Trans. Mechatron.*, vol. 16, no. 6, pp. 1096–1109, Dec. 2011.
- [23] T. Lam, H. Boschloo, M. Mulder, and M. Van Paassen, "Artificial force field for haptic feedback in UAV teleoperation," *IEEE Trans. Syst., Man, Cybern. A, Syst., Humans*, vol. 39, no. 6, pp. 1316–1330, Nov. 2009.
- [24] C. Nielsen, M. Goodrich, and R. Ricks, "Ecological interfaces for improving mobile robot teleoperation," *IEEE Trans. Robot.*, vol. 23, no. 5, pp. 927–941, Oct. 2007.
- [25] F. Janabi-Sharifi and I. Hassanzadeh, "Experimental analysis of mobile-robot teleoperation via shared impedance control," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 41, no. 2, pp. 591–606, Apr. 2011.
- [26] J. Venrooij, D. Abbink, M. Mulder, and M. van Paassen, "A method to measure the relationship between biodynamic feedthrough and neuromuscular admittance," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 41, no. 4, pp. 1158–1169, Aug. 2011.
- [27] D. Abbink, M. Mulder, F. Van der Helm, M. Mulder, and E. Boer, "Measuring neuromuscular control dynamics during car following with continuous haptic feedback," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 41, no. 5, pp. 1239–1249, Oct. 2011.
- [28] G. Burdea and M. Akay, *Force and Touch Feedback for Virtual Reality*. New York: Wiley, 1996.
- [29] G. Gescheider, *Psychophysics: The Fundamentals*. Mahwah, NJ: L. Erlbaum Assoc., 1997.
- [30] M. Fliess, J. Lévine, P. Martin, and P. Rouchon, "Flatness and defect of nonlinear systems: Introductory theory and examples," *Int. J. Control*, vol. 61, no. 6, pp. 1327–1361, 1995.
- [31] M. J. V. Nieuwstadt and R. M. Murray, "Real-time trajectory generation for differentially flat systems," *Int. J. Robust Nonlin. Control*, vol. 8, no. 11, pp. 995–1020, 1998.
- [32] V. Mistler, A. Benallegue, and N. K. M'Sirdi, "Exact linearization and noninteracting control of a 4 rotors helicopter via dynamic feedback," in *Proc. IEEE Int. Symp. Robots Human Interactive Commun.*, 2001, pp. 586–593.
- [33] S. Bouabdallah and R. Siegwart, "Backstepping and sliding-mode techniques applied to an indoor micro quadrotor," in *Proc. IEEE Int. Conf. Robot. Autom.*, 2005, pp. 2247–2252.
- [34] N. Guenard, T. Hamel, and R. Mahony, "A practical visual servo control for an unmanned aerial vehicle," *IEEE Trans. Robot.*, vol. 24, no. 2, pp. 331–340, Apr. 2008.
- [35] L. Ljung, "On the estimation of transfer functions," *Automatica*, vol. 21, no. 6, pp. 677–696, Nov. 1985.
- [36] F. A. Wichmann and N. J. Hill, "The psychometric function: I. Fitting, sampling and goodness-of-fit," *Perception Psychophys.*, vol. 63, no. 8, pp. 1293–1313, Nov. 2001.
- [37] D. Lee and K. Huang, "Passive-set-position-modulation framework for interactive robotic systems," *IEEE Trans. Robot.*, vol. 26, no. 2, pp. 354–369, Apr. 2010.
- [38] H. I. Son, L. Chuang, A. Franchi, J. Kim, D. Lee, S.-W. Lee, H. H. Bühlhoff, and P. R. Giordano, "Measuring an operator's maneuverability performance in the haptic teleoperation of multiple robots," in *Proc. IEEE/RSJ Int. Conf. Intell. Robots Syst.*, 2011, pp. 3039–3046.
- [39] H. I. Son, J. Kim, L. Chuang, A. Franchi, P. R. Giordano, D. Lee, and H. H. Bühlhoff, "An evaluation of haptic cues on the tele-operator's perceptual awareness of multiple UAVs' environments," in *Proc. IEEE World Haptics Conf.*, Jun. 2011, pp. 149–154.
- [40] J. Millan, F. Renkens, J. Mouriño, and W. Gerstner, "Noninvasive brain-actuated control of a mobile robot by human EEG," *IEEE Trans. Biomed. Eng.*, vol. 51, no. 6, pp. 1026–1033, Jun. 2004.
- [41] J. Dolan, M. Friedman, and M. Nagurka, "Dynamic and loaded impedance components in the maintenance of human arm posture," *IEEE Trans. Syst., Man, Cybern.*, vol. 23, no. 3, pp. 698–709, May/Jun. 1993.
- [42] E. Clancy, S. Bouchard, and D. Rancourt, "Estimation and application of EMG amplitude during dynamic contractions," *IEEE Eng. Med. Biol. Mag.*, vol. 20, no. 6, pp. 47–54, Nov./Dec. 2001.
- [43] J. Borenstein and Y. Koren, "Teleautonomous guidance for mobile robots," *IEEE Trans. Syst., Man, Cybern.*, vol. 20, no. 6, pp. 1437–1443, Nov./Dec. 1990.
- [44] S. Stramigioli, R. Mahony, and P. Corke, "A novel approach to haptic tele-operation of aerial robot vehicles," in *Proc. IEEE Int. Conf. Robot. Autom.*, 2010, pp. 5302–5308.



**Hyoung Il Son** (M'11) received the B.S. and M.S. degrees from the School of Mechanical Engineering, Pusan National University, Pusan, Korea, in 1998 and 2000, respectively, and the Ph.D. degree from the Department of Mechanical Engineering, Korea Advanced Institute of Science and Technology, Daejeon, Korea, in 2010.

He was a Senior Researcher with LG Electronics (2003–2005) and Samsung Electronics (2005–2009) and a Research Associate with The University of Tokyo, Tokyo, Japan (2010). Since 2010, he has been a Research Scientist with the Max Planck Institute for Biological Cybernetics, Tübingen, Germany. His research interests include haptics, teleoperation, human-centered control design and evaluation, and supervisory control of discrete-event/hybrid systems.



**Antonio Franchi** (S'07–M'11) received the Laurea degree (*summa cum laude*) in electronic engineering and the Ph.D. degree in control and system theory from the Sapienza University of Rome, Rome, Italy, in 2005 and 2009, respectively.


In 2009, he was a visiting student with the University of California, Santa Barbara. Since 2010, he has been a Research Scientist with the Max Planck Institute for Biological Cybernetics, Tübingen, Germany. His main research interests include autonomous systems and robotics, with a special regard to planning, control, estimation, human–machine interaction, haptics, and robotic software architectures.



**Lewis L. Chuang** received the Ph.D. degree in neuroscience from Eberhard Karls University, Tübingen, Germany, in 2011.

He is currently a Postdoctoral Researcher with the Max Planck Institute for Biological Cybernetics, Tübingen. His research interests lie in understanding how humans actively retrieve and process sensory information in dynamic environments. In doing so, he hopes to inform the development of human–machine interfaces. His research applies a variety of methods, including psychophysics, eye tracking, and psychophysiological signals of workload (e.g., heart-rate variability). He is a Reviewer for *Attention, Perception, & Psychophysics*, *Vision Research*, *Journal of Vision*, and *Perception*.

Dr. Chuang is a Reviewer for Eurographics.



**Junsuk Kim** received the B.S. degree from the Department of Computer and Radio Communications Engineering, Korea University, Seoul, Korea, in 2010 and the M.S. degree from the Department of Brain and Cognitive Engineering, Korea University, in 2012, where he is currently working toward the Ph.D. degree.

His research interests include psychophysical evaluation of haptic teleoperation and supramodal representations of perceived emotions.



**Heinrich H. Bühlhoff** (M'96) received the Ph.D. degree in natural sciences and the Ph.D. degree in biology in 1980 from Eberhard Karls University, Tübingen, Germany.

From 1980 to 1988, he was a Research Scientist with the Max Planck Institute (MPI) for Biological Cybernetics, Tübingen, and the Massachusetts Institute of Technology, Cambridge. From 1988 to 1993, he was an Assistant Professor of cognitive science, then an Associate Professor of cognitive science, and finally a Full Professor of cognitive science with Brown University, Providence, RI. In 1993, he became the Director of the Department for Human Perception, Cognition and Action, MPI for Biological Cybernetics. Since 1996, he has been a Honorary Professor with Eberhard Karls University as well as an Adjunct Professor with Korea University, Seoul, Korea. His research interests include object recognition and categorization, perception and action in virtual environments, and human–robot interaction and perception.

Dr. Bühlhoff became a scientific member of the Max Planck Society in 1993.



**Paolo Robuffo Giordano** (M'08) received the M.Sc. degree in computer science engineering and the Ph.D. degree in systems engineering from the Sapienza University of Rome, Rome, Italy, in 2001 and 2008, respectively.

From 2007 to 2008, he was a Postdoctoral Researcher with the Institute of Robotics and Mechatronics, German Aerospace Center. In 2008, he joined the Max Planck Institute for Biological Cybernetics, Tübingen, Germany, where he is currently a Senior Research Scientist Head of the Human–Robot

Interaction Group. His research interests include nonlinear control, robotics, haptics, and virtual reality applications.